



marlow industries, inc.®
Subsidiary of II-VI INCORPORATED

TECHNICAL DATA SHEET




XLT2423

Single-Stage Thermoelectric Cooler
RoHS 2002/95/EC Compliant

PERFORMANCE VALUES

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (°C-dry N ₂):	58	66
Qmax (watts):	95	106
Imax (amps):	19.0	18.8
Vmax (vdc):	7.7	8.5
AC Resistance (ohms):	0.34	---

MECHANICAL CHARACTERISTICS

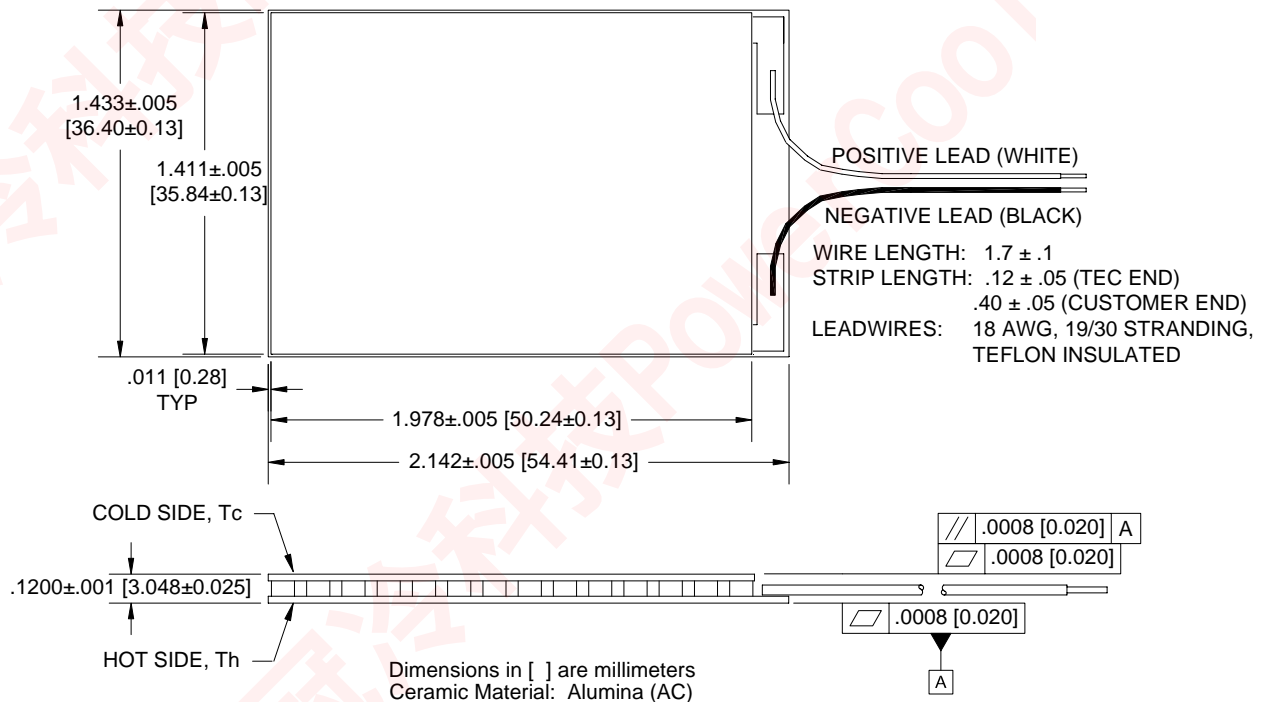


ORDERING OPTIONS

Model Number	Description
XLT2423-31AC	Undiced, one cooler
XLT2423-34AC	Undiced, ACR matched set, four
XLT2423-38AC	Undiced, ACR matched set, eight
XLT2423-41AC	Diced, one cooler
XLT2423-44AC	Diced, ACR matched set, four
XLT2423-48AC	Diced, ACR matched set, eight
XLT2423-71AC	Undiced, One cooler, no leadwires
XLT2423-78AC	Undiced, ACR matched set, eight, no leadwires
XLT2423-81AC	Diced, One cooler, no leadwires
XLT2423-88AC	Diced, ACR matched set, eight, no leadwires

AVAILABLE MODIFICATIONS

ACR Matched in sets of four and eight.
 Specifically designed for thermal cycling applications.
 Capable of rapid heating and cooling rates.
 Proven High Reliability (Data available upon request).
 Rugged construction.
 Porched configuration for enhanced leadwire strength.
 Rated operating temperature of 130°C.
 Height tolerance of ± 0.001 in. (± 0.025 mm) allows for multiple module applications.

ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

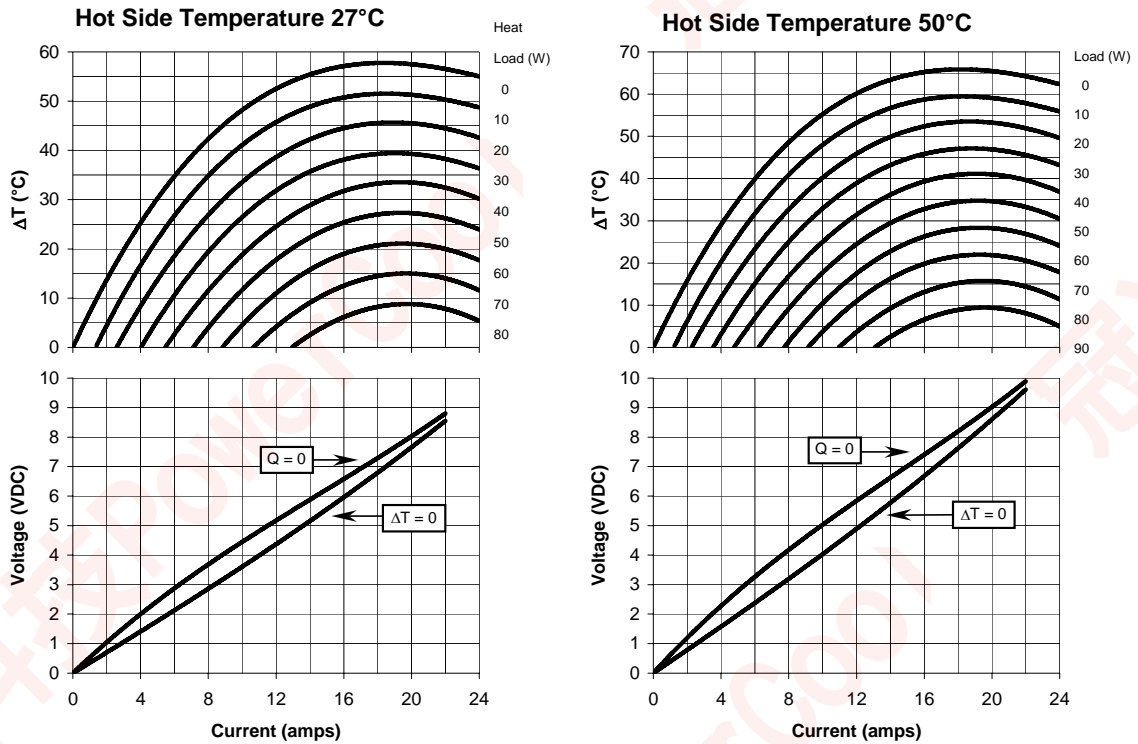

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

Installation

XLT coolers are typically mounted under compression using thermal grease or flexible graphite products. Consult Marlow Industries' Thermoelectric Installation Guide for more details. For additional information, please contact one of our application engineers for technical support.

CONTACT US:

For customer support or general questions please contact a local office below or consult our website for distributor information.

Marlow Industries, Inc.
 10451 Vista Park Road
 Dallas Texas 75238-1645
 214-340-4900 (tel)
 214-341-5212 (fax)
 www.marlow.com

Marlow Industries Europe
 Aberdeen House, South Road
 Haywards Heath
 West Sussex RH164NG UK
 +44 (0)1444-443404 (tel)
 +44 (0)1444-443334(fax)

II-VI Japan Inc.
 WBG Marive East 17F
 2-6 Nakase, Mihama-ku
 Chiba-Shi, Chiba 261-7117
 Japan
 81 43 297 2693 (tel)
 81 43 297 3003 (fax)
 center@ii-vi.co.jp
 www.ii-vi.co.jp

II-VI Singapore Pte., Ltd.
 Blk. 5012, Techplace II
 #04-07 & 05-07/12, Ang Mo Kio Ave. 5
 Singapore 569876
 (65) 6481 8215 (tel)
 (65) 6481 8702 (fax)
 info@ii-vi.com.sg
 www.ii-vi.com.sg

Marlow Industries China, II-VI
 Technologies Beijing
 A subsidiary of II-VI Incorporated
 Rm 202, 1# Lize 2nd Middle Road
 Wangjing, Chaoyang District
 Beijing 100102 China
 010-64398226 ext 105 (tel)
 010-64399315 (fax)
 info@iivibj.com